



Connecting the System

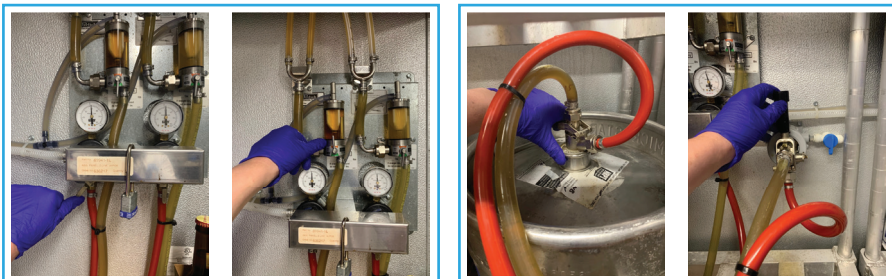

Turn Off the Gas and, if applicable, Deactivate the FOB.

Disconnect the Sankey and Connect it to a Glanola Ring-Main.

Connecting a New Keg

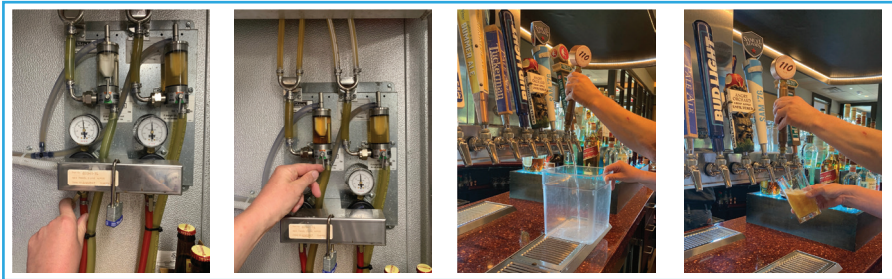

Remove the Sankey from the Ring-Main and Connect it to the Keg to be served.
Turn On the Gas and, if applicable, Reactivate the FOB.
Open the Faucet to Run-off the water in the line and allow the new beer to arrive.


Starting the System & Saving the Beer!



Activate the system by pressing Button 1 (or Button 2 for multiple lines).
Note - If desired, you can serve the beer remaining in the line.


Running the Clean

Purple = Clean Green = Dirty

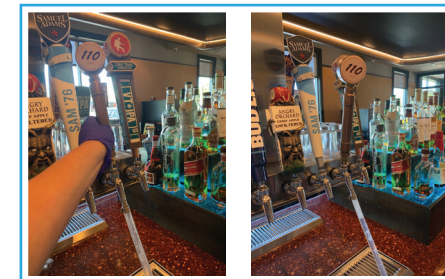

Attach a Drainage Hose to the Faucet (Both Faucets if the line is Split) and Open it / them up to let 'The Clean' commence. 'The Flow' will be any remaining beer in the line, followed by '3 Cycles': a starting water flush, a detergent flush / agitation, an ending water flush.
Upon completion, Close the Faucet(s).

Cleaning Hot Tips!

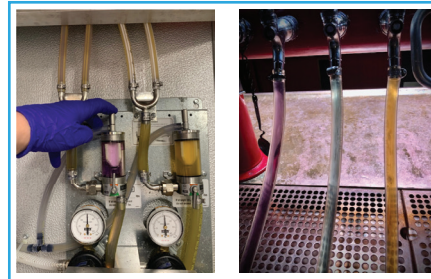

When running a clean, purge the FOB (mid cycle) by pressing it down to remove any air bubbles and get a superior FOB clean!

If the detergent is not coming out Purple (being Green or Brown) by the end of the clean. Run a second clean by pressing Button 1 again.

